# **Dynapac CA5000DCO**

## Single drum vibratory rollers





#### **Technical data**

Masses	
Operating mass (incl. Cab)	16,250 kg
Module mass (front/rear)	10,800/5,450 kg
Max. operating mass	16,700 kg

Dimensions	
Drum width	2,130 mm

Traction	
Vertical oscillation	±9°
Tyre size (12 ply)	23,1 x 26
Theor. gradeability	56 %
Speed range	0-12 km/h

₩.	Compaction	
	Static linear load	50 kg/cm
	Amplitude	0-2 mm
	Vibration frequency	27 Hz
	Centrifugal force	280 kN

Engine	
Fuel tank capacity	272

Engine	
Manufacturer/Model	Deutz TCD6,1L06 (IIIB/4i)
Туре	Water cooled turbo Diesel
Rated power, ISO 14396	129 kW (175 hp ) @ 2,200 rpm

Engine		
Manufacturer/Model	Deutz TCD2012L06 (IIIA/3)	
Туре	Water cooled turbo Diesel	
Rated power, ISO 14396	128 kW (174 hp ) @ 2,200 rpm	


	Hydraulic syst	em
[	Oriving	Hydrostatic
	√ibration √	Hydrostatic
	Steering	Hydrostatic
	Service brake	Hydrostatic in forward and reverse lever.
E	Parking/ Emergency orake	Failsafe multidisc brake in drum gear box and in rear axle.


# **Dynapac CA5000DCO**

## Single drum vibratory rollers



#### **Technical data**

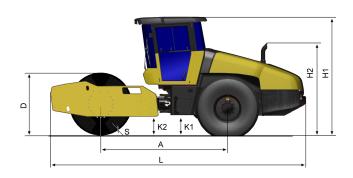

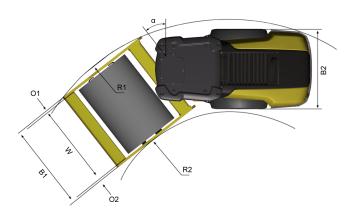

Dimensions	
A. Wheelbase	3,100 mm
B1. Width, front	2,340 mm
B2. Width, rear	2,130 mm
D. Drum diameter	1,536 mm
H1. Height, with ROPS/cab	2,890 mm
H2. Height, w/o ROPS/cab	2,130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	6,240 mm
O1. Overhang, right	105 mm
O2. Overhang, left	105 mm
R1. Turning radius, outside	5,800 mm
R2. Turning radius, inside	3,300 mm
S. Drum shell thickness	43 mm
W. Drum width	2,130 mm
α. Steering angle	±38°